




LT-01




Load Direction



Product Dimension

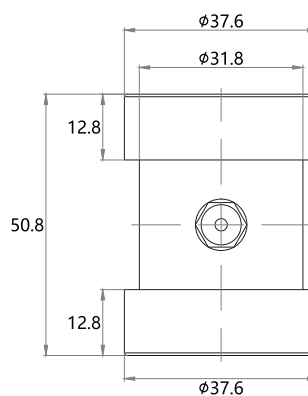
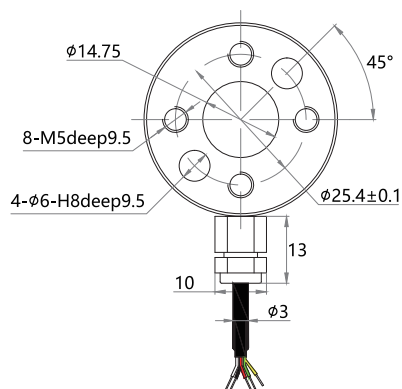


Wiring Diagram

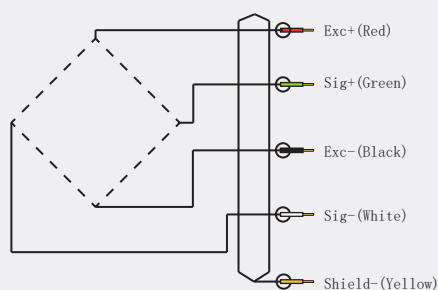

Installation Mode

Flange Mounted, Pin Mounted & Single Flange Mounted



Specifications

Capacity	0 ~ 0.1, 0.2, 0.5, 1, 2, 3, 5, 10, 20, 30, 60, 100NM
Material	Aluminum
Rated Output	1.5 ~ 2.0 mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.1% F.S.
Hysteresis	± 0.1% F.S.
Repeatability	± 0.1% F.S.
Creep (30min)	± 0.05% F.S.
Temp. Effect on Output	± 0.05% F.S. / 10℃
Temp. Effect on Zero	± 0.05% F.S. / 10℃
Input Impedance	410 ± 10 Ω
Output Impedance	350 ± 5 Ω
Insulation	≥5000M Ω /100VDC
Recommended Excitation	3 ~ 10V
Operating Temp. Range	- 20 ~ 65 ℃
Compensated Temp. Range	- 10 ~ 60 ℃
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	Ø 3 x 3m
Protection Class	IP50
TEDS Available	