


## Specifications

Capacity	0 ~ 5, 10, 20, 30, 50, 100, 200, 500, 1000, 2000kg
Material	Stainless Steel
Rated Output	1.0 ~ 1.5 mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.3% F.S.
Hysteresis	± 0.2% F.S.
Repeatability	± 0.2% F.S.
Creep (30min)	± 0.05% F.S.
Temp. Effect on Output	± 0.1% F.S. / 10°C
Temp. Effect on Zero	± 0.1% F.S. / 10°C
Input Impedance	350 ± 10 Ω
Output Impedance	350 ± 5 Ω
Insulation	≥5000M Ω / 100VDC
Recommended Excitation	3 ~ 5V
Operating Temp. Range	- 20 ~ 80 °C
Compensated Temp. Range	- 10 ~ 60 °C
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	∅ 2 x 3m
Protection Class	IP65
TEDS Available	



## LFC-20-4M-H11



### Load Direction

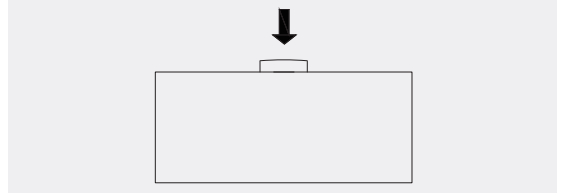



## Product Dimension

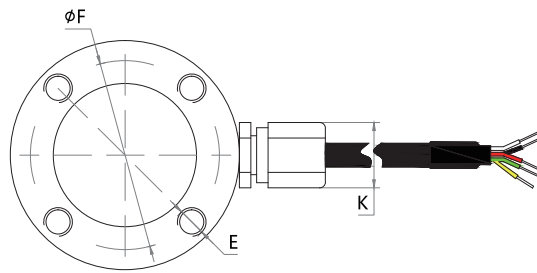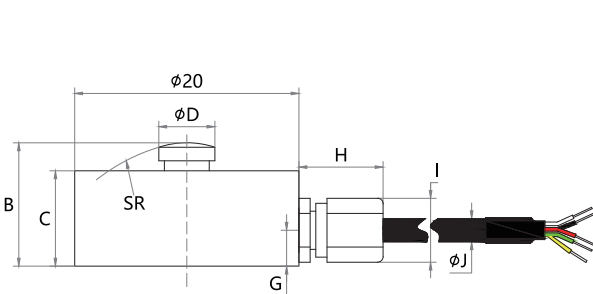

Model	Capacity	B	C	D	SR	E	F	G	H	I	J	K
LFC-20-4M-H11	0 ~ 5-500kg	11	8.5	5	20	4-M2.5 DEEP 5	16.5	3.2	7.5	5.0	2.0	5.7
	1000~2000kg	11	8.5	6	20	4-M2.5 DEEP 5	16.5	3.0	7.5	5.0	2.0	5.7

## Installation Mode

### Screw Mounted

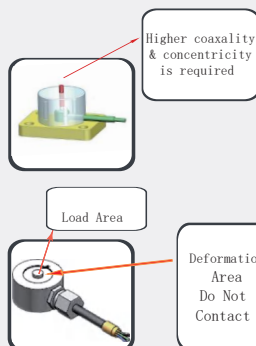

## Wiring Diagram

