


Specifications

Capacity	X: 0 ~ 5/10/20/50/100/200kg Y: 0 ~ 5/10/20/50/100/200kg Z: 0 ~ 10/20/50/100/200kg
Material	Stainless Steel
Rated Output	1.0 ± 10% mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.5% F.S.
Hysteresis	± 0.3% F.S.
Repeatability	± 0.3% F.S.
Creep (30min)	± 0.05% F.S.
Temp. Effect on Output	± 0.05% F.S. / 10℃
Temp. Effect on Zero	± 0.05% F.S. / 10℃
Input Impedance	385(750) ± 10 Ω
Output Impedance	350(700) ± 5 Ω
Insulation	≥5000MΩ/100VDC
Recommended Excitation	3 ~ 10V
Operating Temp. Range	- 20 ~ 80 ℃
Compensated Temp. Range	- 10 ~ 60 ℃
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	12-Pin Connector
Protection Class	IP50
TEDS Available	


LF-303B




Load Direction

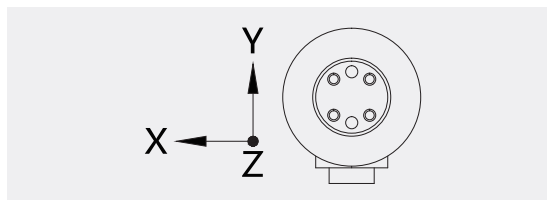

Product Dimension

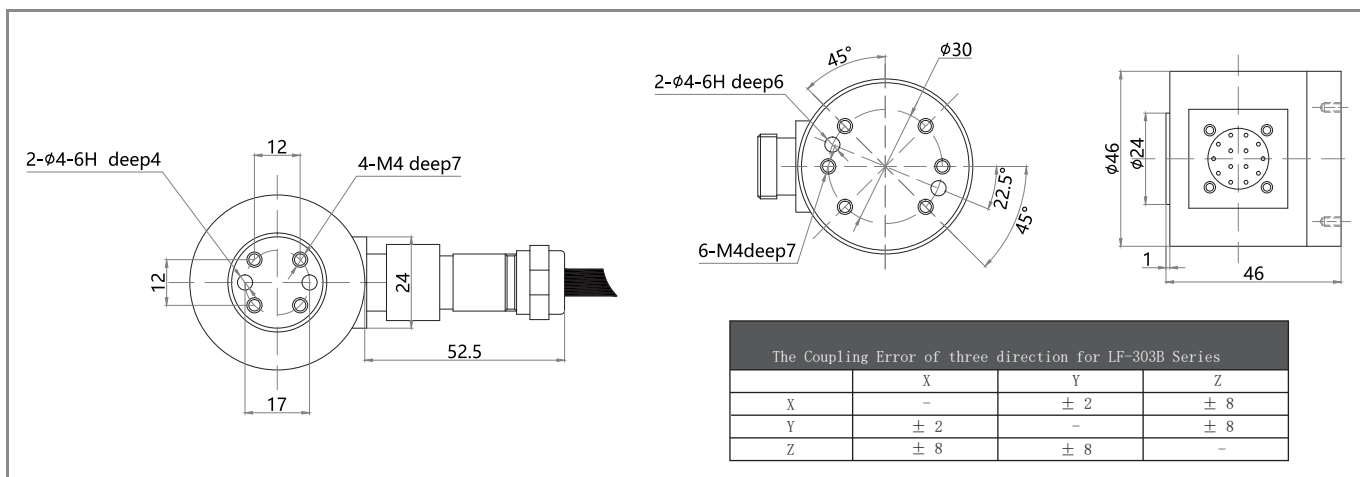

Installation Mode

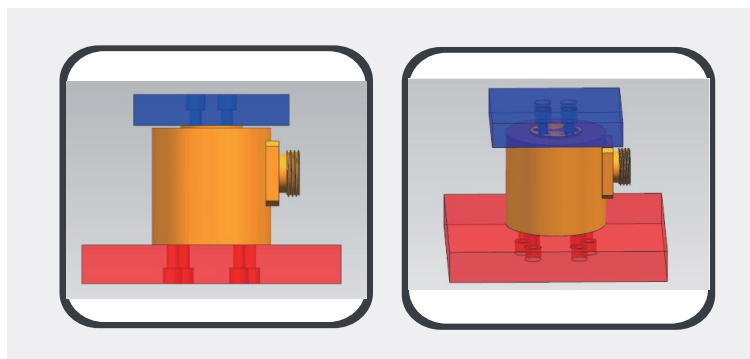

Wiring Diagram

电源:红 E(+) 黑 E(-);
X轴:绿 S(+) 白 S(-);
Y轴:棕 S(+) 灰 S(-);
Z轴:蓝 S(+) 黄 S(-);