


Specifications

Capacity	0 ~ 35, 50, 100, 150, 200, 250, 300, 350kg
Material	Aluminium
Rated Output	2.0 ± 10% mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.02% F.S.
Hysteresis	± 0.02% F.S.
Repeatability	± 0.02% F.S.
Creep (30min)	± 0.02% F.S.
Temp. Effect on Output	± 0.017% F.S. / 10°C
Temp. Effect on Zero	± 0.017% F.S. / 10°C
Input Impedance	410 ± 15 Ω
Output Impedance	350 ± 5 Ω
Insulation	≥5000M Ω / 100VDC
Recommended Excitation	3 ~ 10V
Operating Temp. Range	- 20 ~ 80 °C
Compensated Temp. Range	- 10 ~ 60 °C
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	0.5 x 3m
Protection Class	IP64
TEDS Available	


LFP-16D



Load Direction


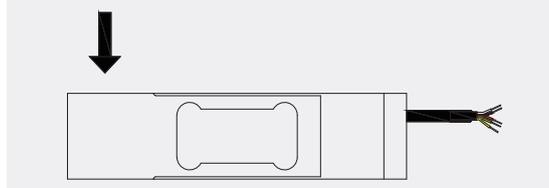


Product Dimension

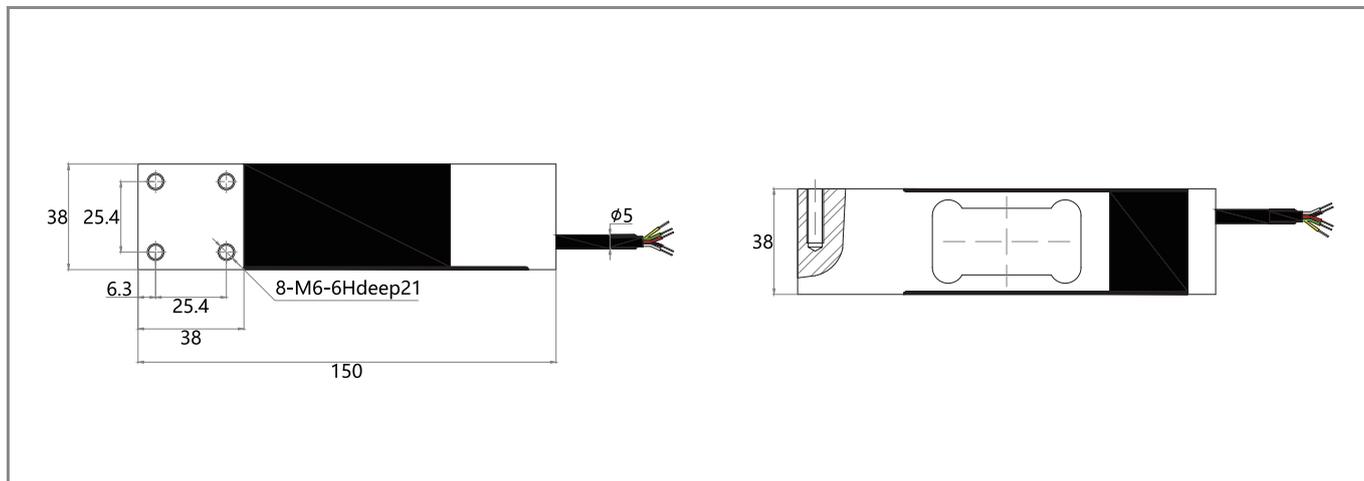

Installation Mode

Screw Mounted



Fixed at one end & load at the other end

Wiring Diagram

