



Specifications

Capacity	0 ~ 5, 10, 20, 30, 50kg
Material	Aluminium/Stainless Steel
Rated Output	2.0 $\pm$ 10% mV/V
Zero Balance	$\pm$ 2 % F.S.
Non-linearity	$\pm$ 0.03% F.S.
Hysteresis	$\pm$ 0.03% F.S.
Repeatability	$\pm$ 0.03% F.S.
Creep (30min)	$\pm$ 0.03% F.S.
Temp. Effect on Output	$\pm$ 0.05% F.S. / 10℃
Temp. Effect on Zero	$\pm$ 0.05% F.S. / 10℃
Input Impedance	750 $\pm$ 10 Ω
Output Impedance	700 $\pm$ 5 Ω
Insulation	$\geq$ 5000M Ω / 100VDC
Recommended Excitation	5 ~ 10V
Operating Temp. Range	- 20 ~ 80 ℃
Compensated Temp. Range	- 10 ~ 60 ℃
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	$\varnothing$ 2 x 3m
Protection Class	IP64
TEDS Available	



LFQ-60

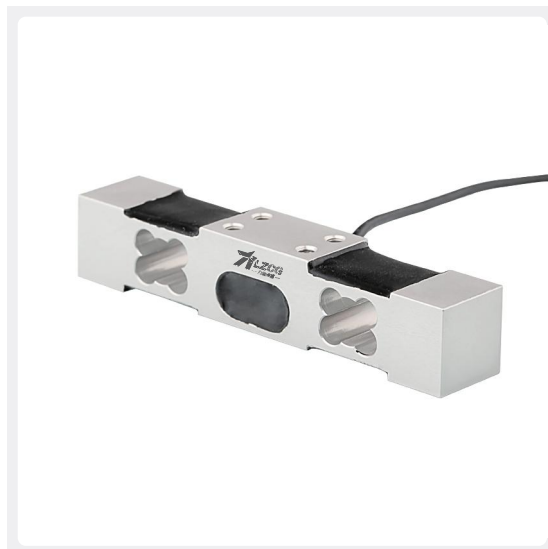

Load Direction

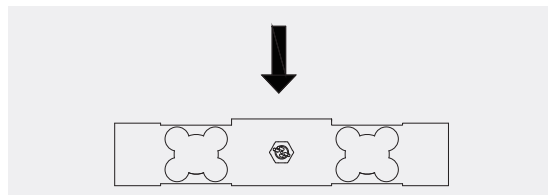


Product Dimension

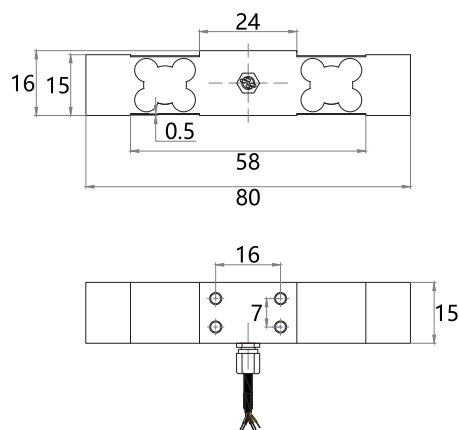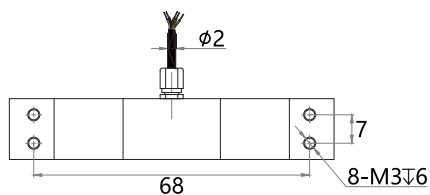

Installation Mode

Screw Mounted

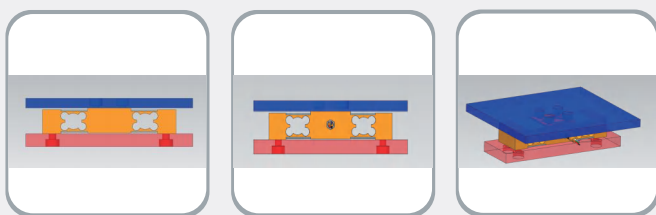

Wiring Diagram

