


## Specifications

Capacity	0 ~ 200, 300, 500, 700, 1000kg
Material	Stainless Steel
Rated Output	1.0 ± 10% mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.3% F.S.
Hysteresis	± 0.3% F.S.
Repeatability	± 0.3% F.S.
Creep (30min)	± 0.1% F.S.
Temp. Effect on Output	± 0.1% F.S. / 10°C
Temp. Effect on Zero	± 0.1% F.S. / 10°C
Input Impedance	350 ± 10 Ω
Output Impedance	350 ± 5 Ω
Insulation	≥5000M Ω/100VDC
Recommended Excitation	2.5 ~ 5V
Operating Temp. Range	- 20 ~ 80 °C
Compensated Temp. Range	- 10 ~ 60 °C
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	Ø 2 x 3m
Protection Class	IP50
TEDS Available	


## LFC-16-H12



### Load Direction

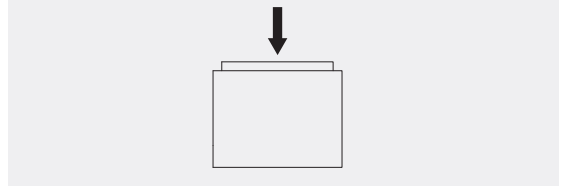


## Product Dimension

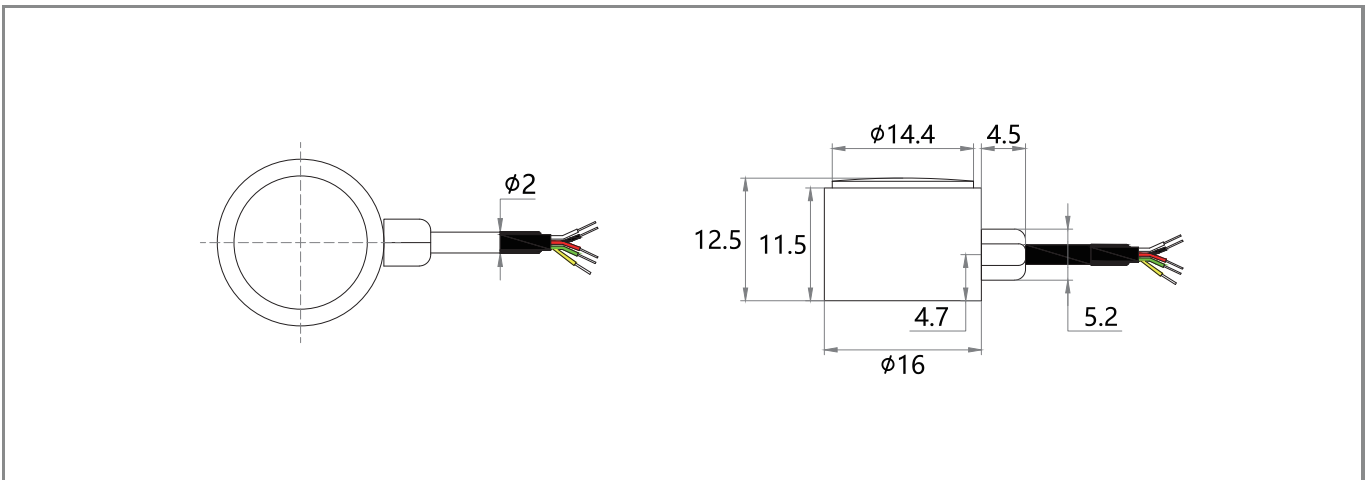

## Installation Mode

### Slot Mounted

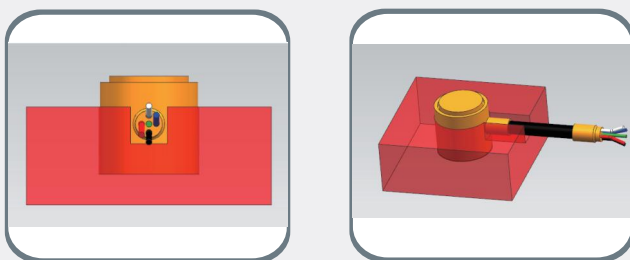

## Wiring Diagram

