


## Specifications

Capacity	0 ~ 5, 10, 20, 30, 50, 100kg
Material	Stainless Steel
Rated Output	1.0 ~ 1.5 mV/V
Zero Balance	± 2 % F.S.
Non-linearity	± 0.5 % F.S.
Hysteresis	± 0.5 % F.S.
Repeatability	± 0.5 % F.S.
Creep (30min)	± 0.1 % F.S.
Temp. Effect on Output	± 0.1 % F.S. / 10°C
Temp. Effect on Zero	± 0.1 % F.S. / 10°C
Input Impedance	350 ± 10 Ω
Output Impedance	350 ± 5 Ω
Insulation	≥5000MΩ/100VDC
Recommended Excitation	3 ~ 5V
Operating Temp. Range	- 20 ~ 80 °C
Compensated Temp. Range	- 10 ~ 60 °C
Safe Overload	150%
Maximum Overload	200%
Cable Specifications	Ø 2 x 3m
Protection Class	IP65
TEDS Available	



## LFT-13C



### Load Direction





## Product Dimension

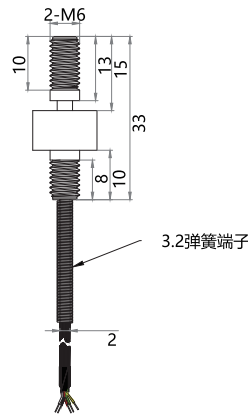

### Installation Mode

#### Screw Mounted



Higher coaxiality & concentricity is required

### Wiring Diagram

